




WIRELINE PACKER ASSEMBLY

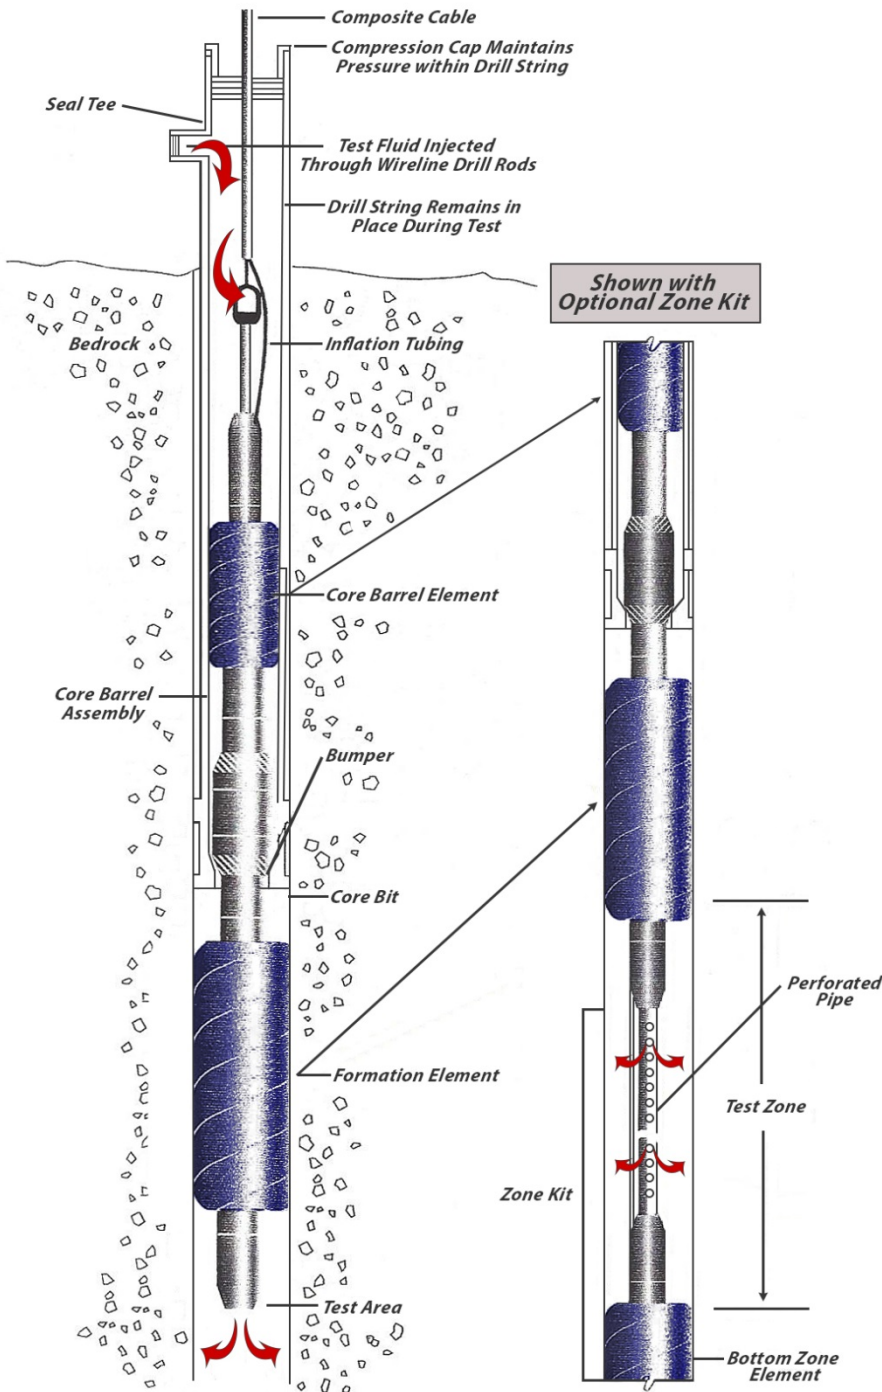

COMPONENTS REQUIRED TO PERFORM A PERMEABILITY TEST WITH A WIRELINE PACKER

- Seal Tee Assembly
- Composite Cable
- Regulator Kit (not shown)
- Water Test Kit (not shown)
- Wireline Packer Assembly
- Zone Testing Kit (optional)

CME offers Wireline packer Systems for N size, H size, and P size core barrels.

Many sizes of Standard Packer assemblies are available for open hole testing as well.

OPERATING NOTE:

- Core Barrel element is inflated to force the test fluid through center tube.
- Formation Element is inflated to seal off test area.

For more information, call 800-325-8827 or email productupdates@cmeco.com!

DEDICATION QUALITY KNOWLEDGE

CME is dedicated to providing the highest quality products and superior customer service, supported by the most experienced and knowledgeable sales staff in the industry.

Central Mine Equipment Company • 4215 Rider Trail North • Earth City, MO 63045

Phone: 314.291.7700 • 800.325.8827 • Fax: 314.291.4880 • E-mail: productupdates@cmeco.com • Website: www.cmeco.com