




WIRELINE PACKER ASSEMBLY

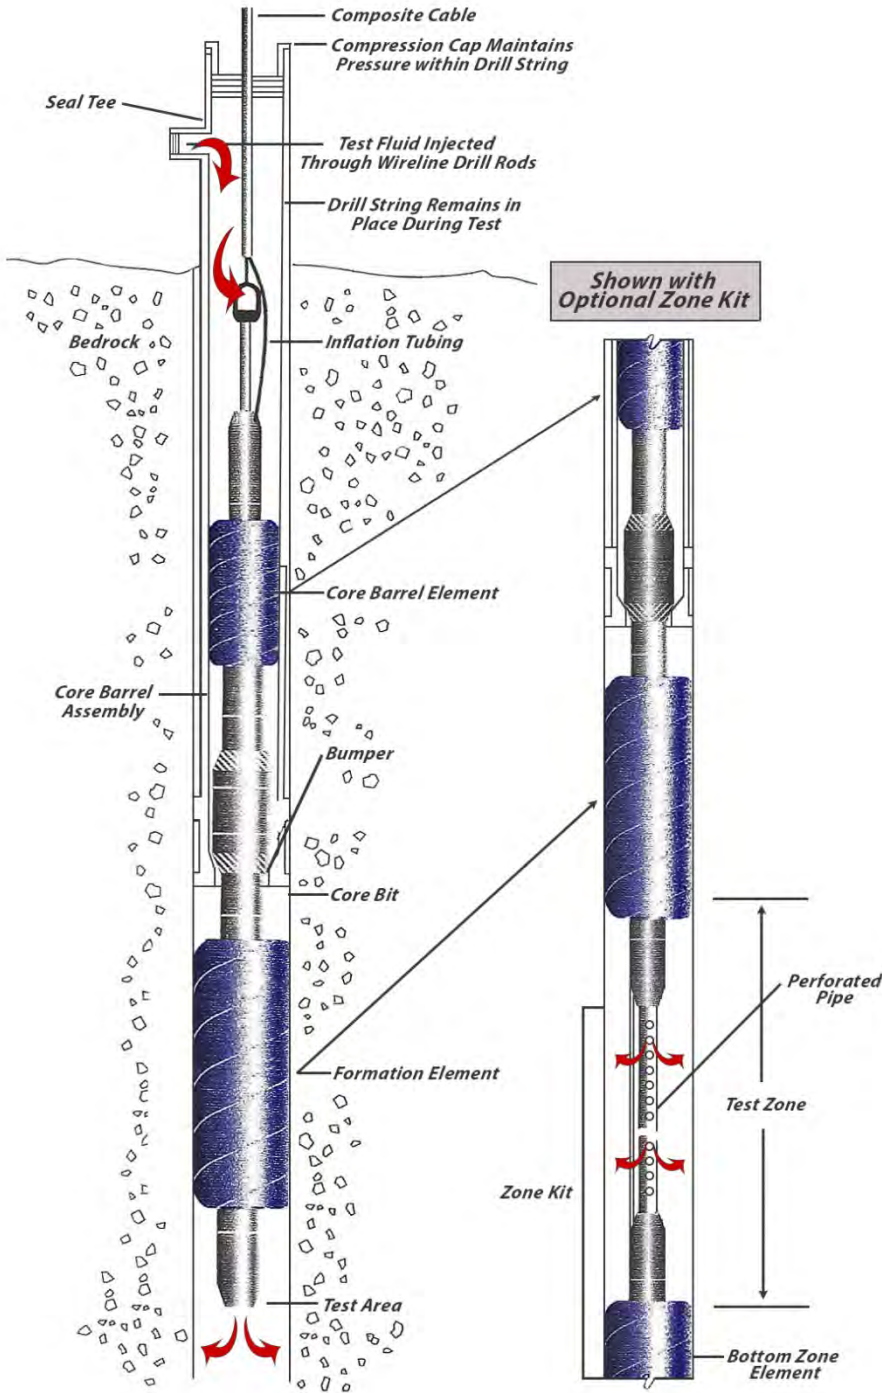

COMPONENTS REQUIRED TO PERFORM A PERMEABILITY TEST WITH A WIRELINE PACKER

- Seal Tee Assembly
- Composite Cable
- Regulator Kit (not shown)
- Water Test Kit (not shown)
- Wireline Packer Assembly
- Zone Testing Kit (optional)

CME offers Wireline packer Systems for N size, H size, and P size core barrels.

Many sizes of Standard Packer assemblies are available for open hole testing as well.

OPERATING NOTE:

- Core Barrel element is inflated to force the test fluid through center tube.
- Formation Element is inflated to seal off test area.

For more information, call 800-325-8827 or email productupdates@cmeco.com!

DEDICATION QUALITY KNOWLEDGE

CME is dedicated to providing the highest quality products and superior customer service, supported by the most experienced and knowledgeable sales staff in the industry.